

Permanent ultrasonic flow meter

FLUXUS[®] WD

Non-invasive Water Flow and
Temperature Monitoring

Outstanding low flow accuracy
down to 0.01 m/s

Temperature measurement
accuracy of ± 0.2 K

Minimal installation costs and
zero pipe interference

Permanently drift-free and
no zero calibration needed


Temperature compensated
transducers


IP68 transducers

Permanent maintenance-free
coupling pads

Transducers can be buried
(no chamber required)

FLEXIM
when measuring matters

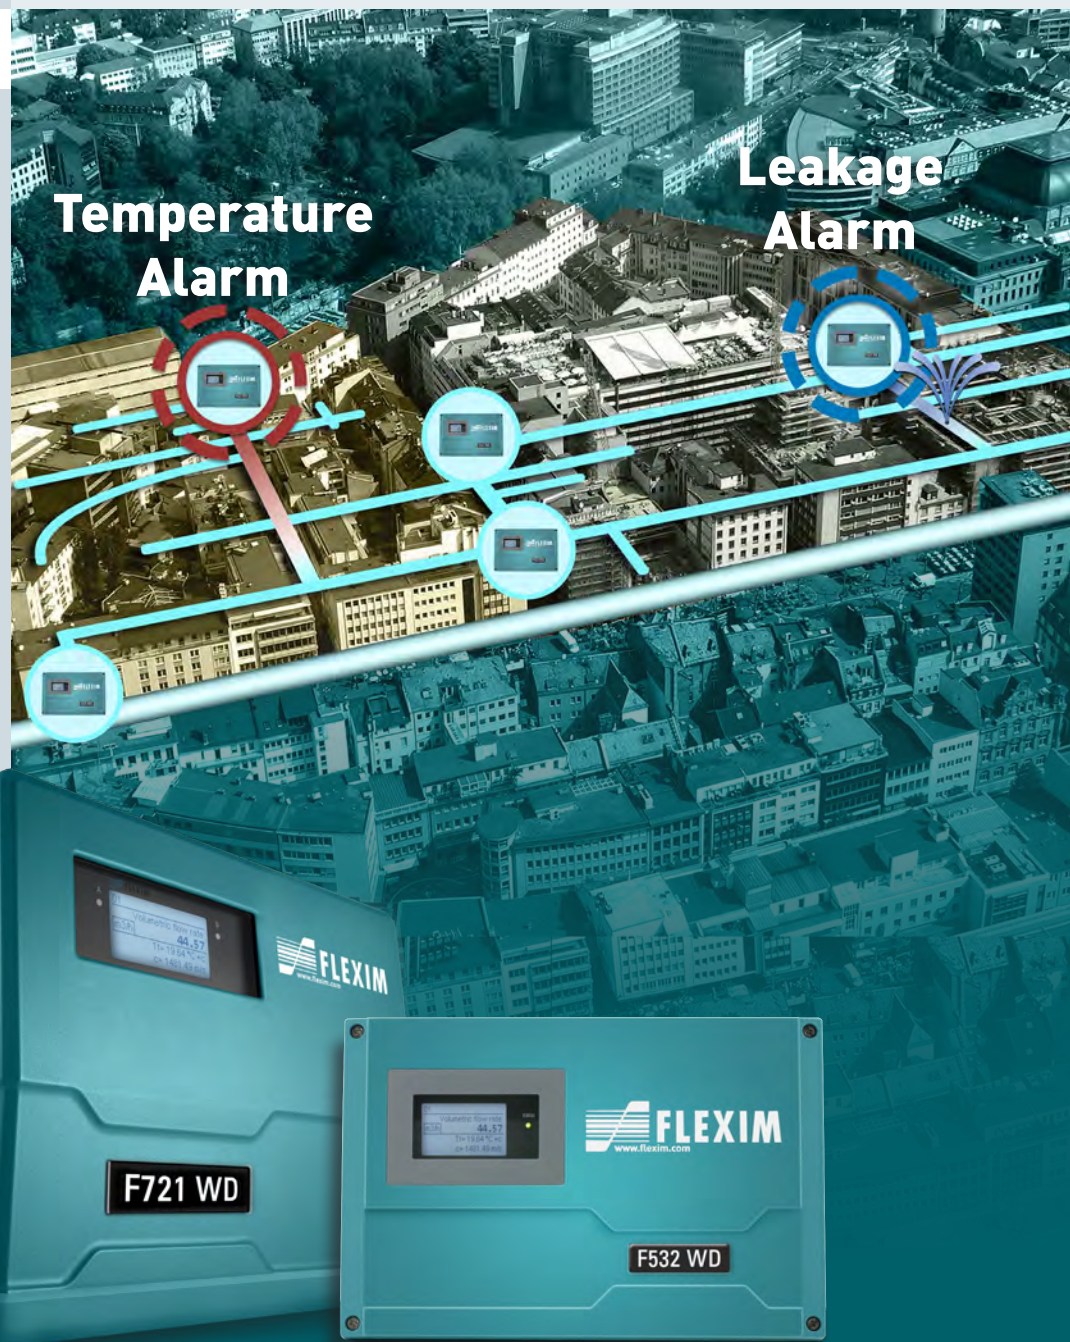

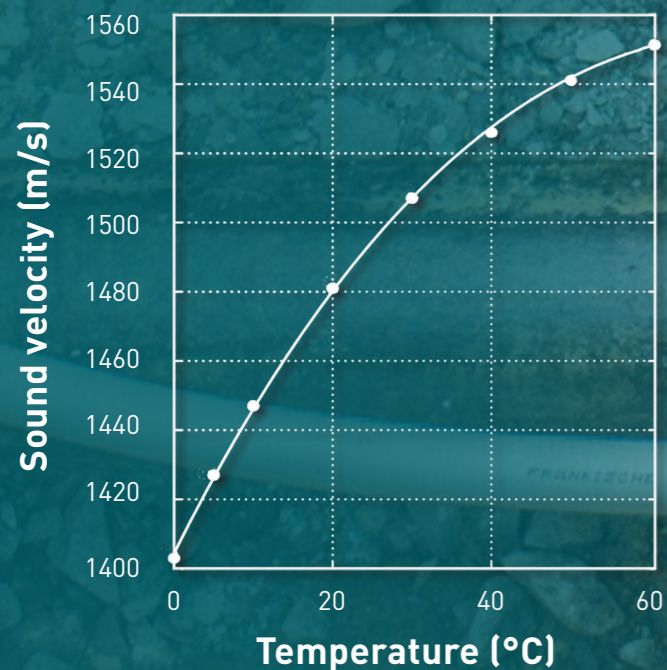

Drift-free flow measurement


There is no method of zero drift correction for our instruments – because they just don't drift. This also applies to the WD Series that is **installed without zero calibration and remains drift-free, permanently**. FLEXIM is the only company that accomplishes this, thanks to its unique combination of matched piezo-transducers and advanced factory calibration.

Outstanding low flow accuracy

The WD Series belongs to the most reliable and accurate ultrasonic clamp-on systems. Furthermore, it **measures flow rates as low as 0.01 m/s**. The inaccuracy of other meter technologies can increase so dramatically in the low flow range, that they are unsuitable for monitoring minimum night flows. But for water suppliers the **precise monitoring of minimum night flows** is an essential part of their leakage detection activities – and the WD Series is the ideal tool for this task.

Non-invasive temperature measurement

Bacterial growth increases in drinking water networks with increasing temperatures. Especially in parts of the network where flow velocities are low, leading to longer residence times, higher water temperatures represent a hygienic risk. The **technology leader FLEXIM** is the first to offer a precise **non-invasive temperature measurement** based on ultrasound technology. Now water suppliers can monitor volume flow, velocity, and temperature with one device.

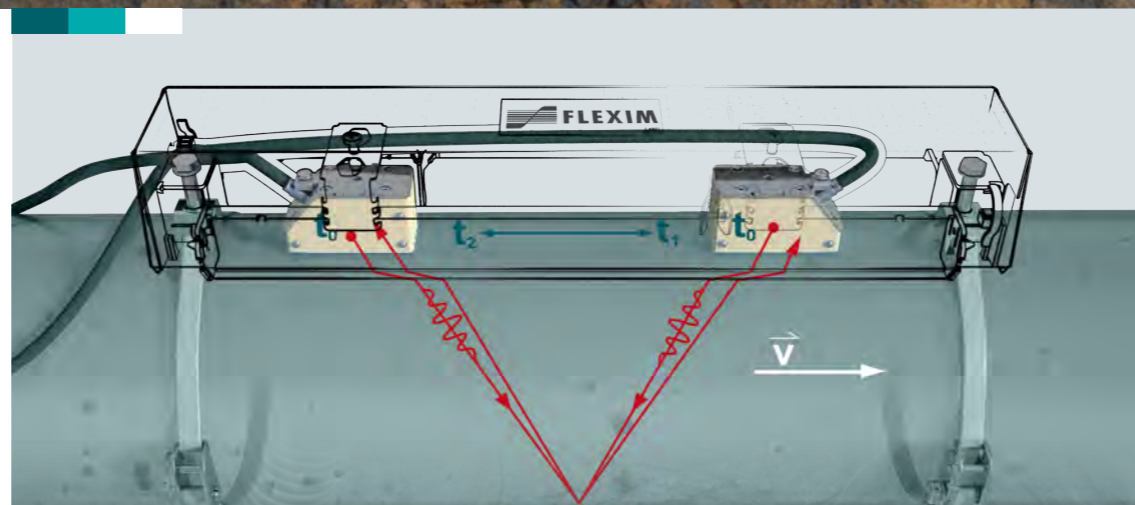

Flow velocity	0.01 m/s
Temperature	12.4 °C
Flow rate	2.262 m³/h

Low installation costs

When creating a new flow measurement point the main costs are not incurred by the instrument but by the installation work (supply interruption, pipe cutting, pipe flushing, etc.). These costs are significantly reduced using the **clamp-on technology** of the WD Series that does not require any work that affects the integrity of the pipe. This enables a **very simple and cost-effective** installation of further flow measurement points within an existing water supply network.

Built to last

The WD Series comes with the **most robust mounting system** on the market. The transducers are fixed to the pipe with broad stainless steel straps and secured in robust stainless steel housings. The transducers themselves have **IP68 protection** and reinforced transducer cables. They are connected to the pipe with **permanent coupling pads, instead of coupling gel** that can deteriorate or be washed away. All this ensures the durability of the system and makes it **suitable for both installations in chambers and buried installations**.

Works on difficult pipes

The WD Series is available with different transducer types and is suitable for inner diameters ranging from 25 ... 6500 mm. The strong signal output and noise suppression technology make it possible to **use the WD Series on all pipe materials**, even on such challenging ones as fiber-reinforced plastic (FRP) pipes. The **outstanding performance** of FLEXIM is shown by thousands of references worldwide. Contact your local FLEXIM support office for more details.

FLEXIM

More than 30 years of experience



Advanced Meter Verification

Advanced Meter Verification (AMV) allows you to check the health of your FLUXUS® flowmeter in depth directly on site without the need of process interruption.



Technical Data

	F721 WD	F532 WD
Number of measuring channels	1 or 2	1
Transducer for pipe sizes range	50...6500 mm	25 ... 2000 mm
Volumetric flow rate uncertainty	±1% v. MW ±0,005 m/s	
Volumetric flow rate repeatability	0,15% v. MW ±0,005 m/s	
Temperature reading uncertainty	±0,2 K (fluid temperature 0 °C ... 30 °C)	
Power supply	100 ... 230 VAC or 20 ...32 VDC or 11 ... 16 VDC	90 ... 250 VAC or 11 ... 32 VDC
Transducer degree of protection	IP68 or IP67	
Transducer for temperature range	-40 °C ... 130 °C	
Outputs	4 - 20 mA aktive / passive 4 - 20 mA HART aktive / passive pulse / binary	
Digital communication	Modbus RTU/TCP, BACnet MSTP/IP M-Bus, Profibus PA, Foundation Fieldbus	Modbus RTU/TCP, BACnet MSTP/IP M-Bus

FLEXIM GmbH
Berlin
info@flexim.de

FLEXIM Austria GmbH
Olbendorf
office@flexim.at

FLEXIM Instruments Benelux B.V.
Berkel en Rodenrijs
benelux@flexim.com

FLEXIM France SAS
Limonest
info@flexim.fr

FLEXIM Instruments UK Ltd.
Northwich
sales@flexim.co.uk

FLEXIM Middle East
Dubai South
salesme@flexim.com

FLEXIM Flow India Pvt. Ltd
Rohini New Delhi
salesindia@flexim.com

FLEXIM Japan
Chiba
salesjapan@flexim.com

FLEXIM Instruments Asia Pte Ltd.
Singapur
salessg@flexim.com

FLEXIM Instruments China
Shanghai
saleschina@flexim.com

FLEXIM S.A., Chile
Las Condes
info@flexim.cl

FLEXIM AMERICAS Corporation, USA
Edgewood, NY
salesus@flexim.com



www.flexim.com

For more detailed Information please download the Technical Specifications here: www.flexim.com.